

A woman with dark hair tied back, wearing a white bathrobe with a purple and blue striped V-neckline, is smiling as she washes her hands in a white sink. She is holding a chrome faucet sprayer. The background is a plain white wall with a chrome faucet and a soap dispenser.

Daikin Altherma Low Temperature Split

User Guide

Notes

Your new Daikin Altherma heat pump

In this guide you will find information and guidelines that will allow you to run your Daikin Altherma heat pump system in the most energy efficient and cost effective way.

We hope you enjoy a warm and comfortable home.

System overview

The heart of your new central heating system is a highly efficient Daikin Altherma air-to-water heat pump. The heat pump heats the water which flows around your central heating and separately heats the hot water when required in the hot water cylinder. The central heating is usually controlled from a Daikin controller or programmable room thermostat which switches

the heat pump on and off at preset times, sending warm water through the central heating. Most radiators have thermostats (TRV's) fitted to control the individual room temperatures.

To enable you to get the most from your system, it is important to understand how it is provided and how it is set up.



Outdoor unit



Integrated Indoor unit



Daikin Altherma controller

Your heating system in detail and getting the most from it



Outdoor unit

The heat pump is outside. This extracts heat from the air, even below 0°C and uses this heat to heat the water passing through the central heating and hot water cylinder.

Cylinder

The cylinder has been programmed once a week to heat the hot water above 60°C to ensure that it remains bacteria free.

Integrated unit

This is located indoors. This unit distributes hot water around the central heating and to the cylinder. The Daikin Altherma controller communicates with the Hydrobox (indoor unit) for efficient use.



Netatmo Wireless Controls* (optional)

Hot water preparation in detail

Your system is set up to heat the water in the cylinder at the time when it is cheapest. Your system should be set up to heat the water in the cylinder in schedules. This is the most efficient way to heat your water. Done generally during off peak heating periods.

Programmable room thermostat

You may have a room thermostat installed in your property. It would be located in the hall or within certain rooms. It controls when the house is heated, and to what temperature.

It is likely the thermostat has been set to heat the house to 21°C in the early morning, lunchtime and evening, with a cooler 18°C at other times from Monday to Friday. At weekends, it is set to 21°C from early morning until late evening, with 18°C over night.


Radiators

Most radiators are fitted with Thermostatic Radiator Valves (TRV's) as shown in the picture which ensures rooms will not become too warm. The higher the number, the warmer the room.

Make sure TRV valve is open for heating



Your Daikin Altherma remote controller

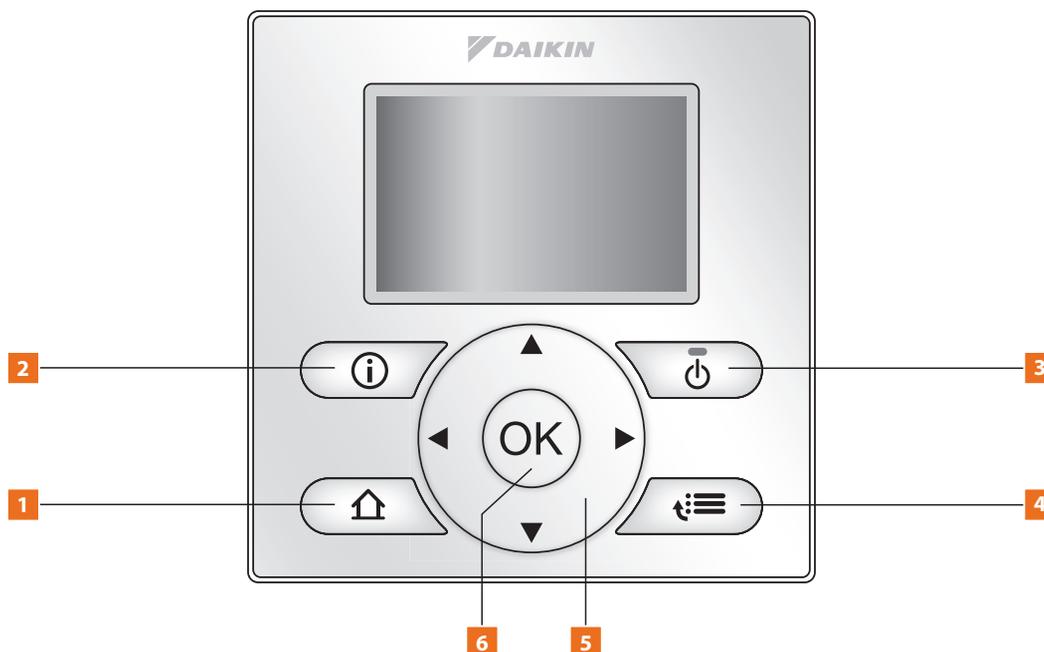

1. Access home pages

- Switches between home pages for room temperature, tank temperature and leaving water temperature (when on the home pages)
- Goes to the home page (when you are in the menu structure)

2. Error information

- If a fault occurs with your Daikin Altherma heat pump, the information will be displayed here. Please note that for a number of potential issues, the Altherma is 'self righting' and the details provided are for historic information only. Please also note that historic information is also retained which will not affect the operation of the system

3. On/off

- Turns on and off the central heating and hot water, depending on which home screen is shown on the display. When on, a green light will be on the button. This level of control is normally used during the summer months to switch off the central heating. This can also be used to turn off the hot water when going on holiday

4. Menu/back

- Opens menu page when on the home page or goes back a level when you are within the menu structure

5. Navigation buttons

- Navigates through the menu structure, selects and changes settings

6. OK/enter button

- Confirms a selection
- Goes to the next step when in programming mode
- Enters a sub-menu when in the menu structure

Useful functions on your Daikin Altherma controller

Raising the hot water temperature

Storing water at higher temperatures than required is less energy efficient. As well as using more energy to heat the water, there is a heat loss from the cylinder, which will mean your energy cost will increase.

Should you find there is insufficient hot water for your needs, the temperature can be increased by going to the domestic hot water home page.

1. Press  until you reach the domestic hot water home page, this will be indicated by 'tank' appearing on the top right of the screen
2. Press  to increase the temperature of stored hot water

Note: It is recommended to increase the domestic hot water value by 2°C at a time, until there is sufficient hot water.

Additional hot water other than pre-set times (boost function)

If you run out of hot water you can activate the booster mode, to heat the hot water up to temperature.

1. Press  until you reach the domestic hot water home page, this will be indicated by 'tank' appearing on the top right of the screen
2. Press  for more than 5 seconds to activate domestic hot water booster mode

Note: Increased use of boost function will affect overall efficiency of the system.

Note: If you see the  symbol, this means the domestic hot water is based on weather compensation, thus cannot be changed from the home menu. Please call your contractor.

Maximising your energy savings

To increase the efficiency of the central heating system, your heat pump will automatically vary the temperature of the water going through

your central heating. The colder the temperature gets outside, the warmer the circulating water through your central heating.

Hot water is always controlled by the heat pump via its home screen.

The heating demand can be controlled by the Daikin controller, but can also be controlled by a third party thermostat such as the Netatmo (page 4). In this case, the heating flow temperature is controlled by the controller.

Note: You need to ensure the room temperature function is 'ON' to be able to adjust the settings. Press  if you do not see a green light above the  symbol.

Activating the schedule timer

1. Press  until you reach the room temperature home page (display will show 'room' in top right corner)
2. Use the  or  button to move between heating modes
3. When you reach the  symbol you are in scheduled mode

The next scheduled timer function is shown at the bottom of the screen, for example wed 17:00 

Heating modes:

 = Scheduled mode

 = Comfort daytime mode (20°C)

 = Eco nighttime mode (18°C)

Note:

 = At the next scheduled action, desired temperature will increase

 = At the next scheduled action, desired temperature will not change

 = At the next scheduled action, desired temperature will decrease

Setting the clock

If for any reason you require to re-set the clock,

1. Press  to go to any home page
2. Press  to enter the menu function and press  when 'set time / date' is highlighted
3. Press  until you reach the 'time' setting. Press 
4. Press to adjust the hour  or  and then  or  to move across to adjust the minutes. Now Press  or  to adjust the minutes
5. Press  to confirm and save the new time and press  to return to the home page



Changing the central heating timer settings

If you wish to set the central heating to heat at times other than those already set, you need to adjust the settings on the controller:

1. Press  to go to the home page
2. Press  to enter the menu function
3. Press  until 'user settings' is highlighted, press 
4. Press  until 'set schedules' is highlighted, press 
5. Press  until 'room temp.' is highlighted, press 
6. Press  until 'set heating schedule' is highlighted, press 
7. To change an existing schedule choose the schedule, press 
OR if you want to start a new schedule press  until 'empty' is highlighted, press 
8. Press  until 'MON' is highlighted, this is the schedule for Monday
9. Press  to enter the schedule for Monday
10. Press  or  to change the time of the schedule and press  to change the temperature
11. Press  to move to the next schedule for the day
12. Keep pressing  to exit the schedule for Monday
13. To copy the Monday schedule, press  and press  until 'copy day' is highlighted
14. Press  to move between days, press  to select days you want to copy and press 

Changing the type of schedule timer (e.g. user defined, predefined)

1. Press  to enter menu and press  until 'select schedules' is highlighted and press 
2. When 'room temperature' is highlighted press 
3. When 'heating' is highlighted, press 
4. Press  until the name of the schedule you have changed is highlighted and press 
5. Press  to go to the home page

Your checklist for diagnosing possible faults

If the radiator is too cold check that the radiator TRV is set to a high enough level.

Is the stat calling?

A room may become warm enough without the radiator being more than lukewarm.

Do you need heat? Is the programmable thermostat set too low?

Check that the temperature on the programmable thermostat is set high enough to start the heat pump.

Is the mains power switched off?

Check that the heating switches are switched ON, including the switch located next to the outdoor unit.

In the event you have checked the points opposite, and the system still fails to operate normally, you can manually reset the system by turning off the power, waiting 60 seconds then turning it back on.

If the system still does not operate as normal, check the display on the controller for a fault code (typically a number and a letter for example 7H) and contact your housing association, making reference to the displayed code.

www.daikin.ie

For full user instructions, please refer to the Daikin Altherma operation manual.



[daikin.ie](https://www.daikin.ie)

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Ireland. Daikin Ireland has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Ireland explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Ireland.